


Protocol

**GC Condition**

System	: SHIMADZU GC-2010、GCMS-QP2010 Plus
Column	: InertCap Pure-WAX (Cat.1010-68142) 0.25mmI.D. × 30m df=0.25 μ m
Column Temp	: 40°C(5min)→4°C/min→250°C(5min)
Carrier Gas	: He 120kPa
Injection	: Split 1:10, 1 μ L 250°C
Detection	: MS Scan (m/z;35-450)

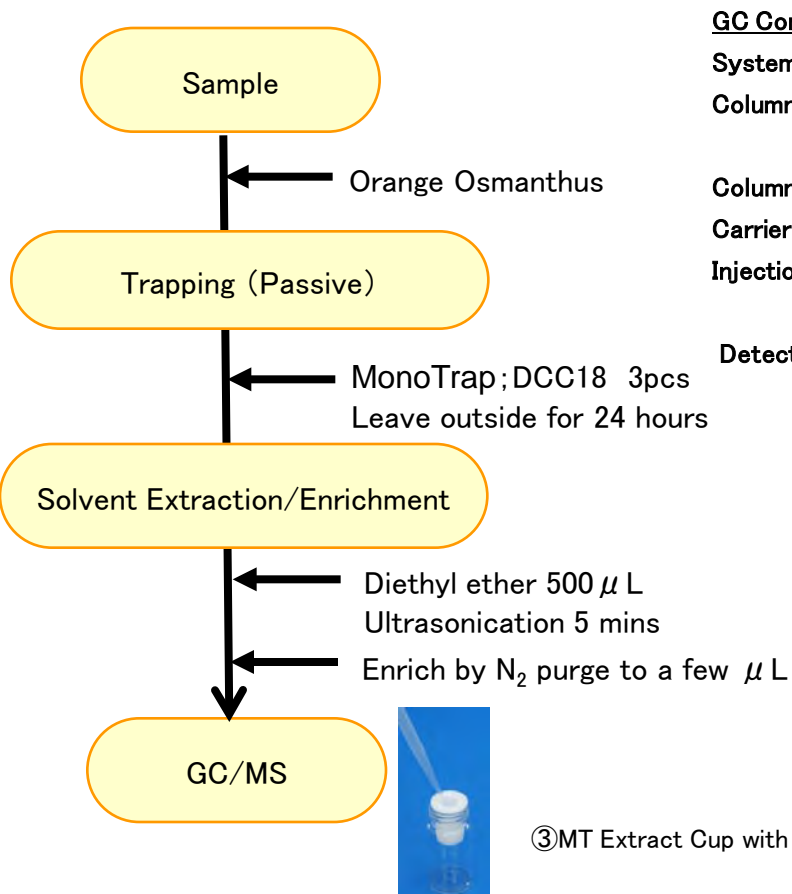