


Protocol

**GC Condition**

System	: SHIMADZU GC-2010, GCMS-QP2010
Column	: InertCap Pure-WAX (Cat. 1010-68142) 0.25mm I.D. \times 30m df=0.25 μ m
Column Temp	: 70°C \rightarrow 4°C/min \rightarrow 220°C (30min)
Carrier Gas	: He 90kPa
Injection	: Splitless, 1 μ L 250°C
Detection	: MS Scan (m/z; 35-450)

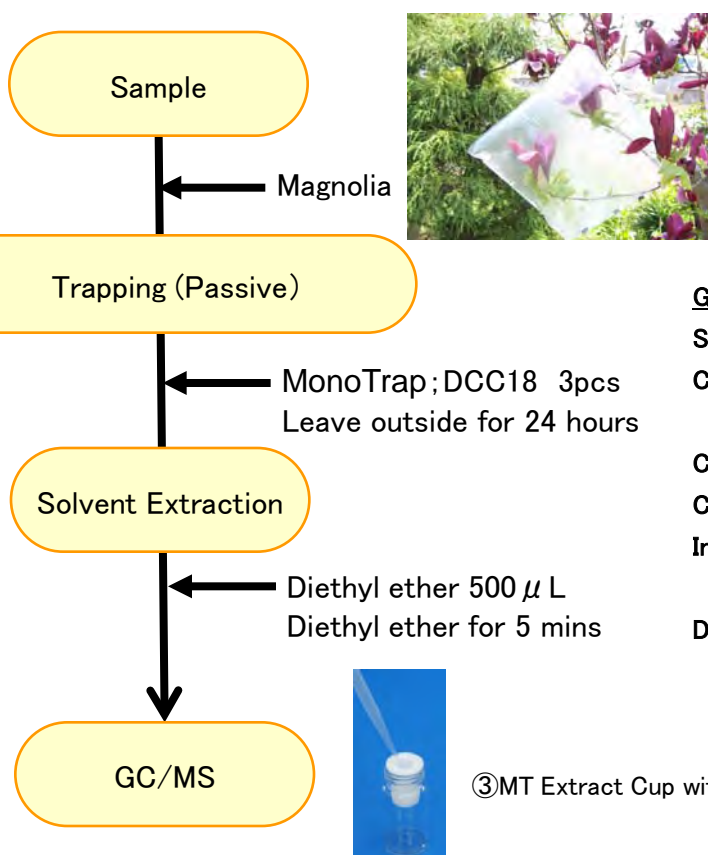